

移動電源型號：WT-01

用戶手冊


感謝您使用WT-01移動電源

本產品適合為絕大部分DC-5V的通訊及數碼產品充電



產品介紹

- 1.本產品是由2個USB口，一個Type-c口，一個Micro口，一個無線充，一個數碼管顯示屏，4個照明燈組成。



- 2.電量指示：本產品帶1個數碼管顯示屏，便於您對移動電源掌控，按一下按鍵，可顯示當前電量狀態。



- 3.照明燈打開模式：長按3秒按鍵，4個燈亮；單擊按鍵，4個燈微亮；再單擊按鍵，SOS模式；再單擊按鍵，快閃模式；長按3秒關閉4個燈。

- 4.單擊按鍵打開無線充，綠色無線充指示燈常亮，如果35秒後無線充上無設備，無線充功能關閉，同時無線充綠色指示燈滅，無線充功率故障指示燈顯紅色。

給設備和手機充電

- 1.支持QC快充，快速給設備充電。
- 2.支持無線充最大10W,iPhone7.5W.

- 3.支持設備邊充邊放。
- 4.支持大部分DC5V的手機和設備充電。
- 5.根據不同的手機和設備選擇USB線。

給移動電源充電

- 1.本產品支持Type-C口、Micro口給移動電源充電.支持太陽能給移動電源充電.太陽能充電最大功率為5.5V/0.3A（如圖2/3/4）



圖2：TYPE-C口給移動電源充電



圖3：Micro口給移動電源充電




圖4：太陽能板給移動電源充電

- 2.不同的充電器給移動電源充滿時間不一樣，使用快充充电器最快可5小時充滿整個移動電源。

注意事項

- 1.因本品容量較大，采用快充充电器，為其充滿最快需5小時左右，具體請以實際為準。
- 2.若使用本品給用電設備充電時出現不能充電，請檢查接線是否正常，牢固.充電接口配件是否合適，建議選用隨機附送配件或正規品牌電源適配器與充電線為其充電。
- 3.移動電源存在轉換效率，故移動電源容量不等於可充容量。
- 4.本移動電源適合給絕大部分手機充電，會出現不支持個別型號手機充電。
- 5.建議至少每6個月內為其完成一次完全充電。

儲存與工作溫度

儲存與工作溫度（為保護電池與延長電池壽命，盡可能在電池的正常溫度範圍內使用，熱量最容易降低電池的效能）

儲存溫度：-5~+35℃（小於一個月）、-5~+30℃（小於六個月）

工作溫度：充電：0~+45℃；放電：-20~+60℃

安全說明

警告：不遵循這些安全說明可能會導致起火、觸電、損壞或其他傷害。



選用高品質鋰電池與優質芯片，請放心使用

- 1.請不要擅自拆卸本產品，不要將產品放入高溫處或投入火中，否則會有燃燒或爆炸危險。
- 2.請勿靠近易燃物品及在陽光下暴曬。
- 3.請勿與堅硬的物體相撞。
- 4.如果發現本品有鼓脹等明顯不良現象或被充電設備有鼓脹等其他明顯不良現象，請用戶停止使用本產品。
- 5.此設備不適用於生理、感知和心智能力低下的人士（包括兒童），除非有專門負責他們人身安全的人士監督或指導他們使用.應當看管好小孩，以確保他們不將此當玩具來玩。

技術規格

類型：鋰電
容量：26800mAh
太陽能輸入：DC5.5V/0.3A
Micro輸入:DC5V/3A 9V/2A 12V/1.5A
TYPE-C輸入:DC5V/3A 9V/2A 12V/1.5A
USB1輸出：DC5V/2A
USB2輸出:DC5V/4.5A 4.5V/5A 9V/2A 12V/1.5A
TYPE-C輸出:DC5V/3A 9V/2A 12V/1.5A
無線充輸出：10W
尺寸:176*86.4*28.7mm
重量：530g
顏色：黑 紅 藍 橙

產品清單

移動電源*1PCS
A-C充電線*1PCS
說明書*1PCS
掛繩*1PCS
保修卡*1PCS

保修卡

本產品為客戶提供自購買之日起12個月內的保修服務

保障條件:需要保修服務時,請出示本保修卡.並請詳細填寫相關內容.本公司向產品用戶提供從產品購買之日起12個月的保質期。

保修範圍：

- 1.在正常使用的狀態下出現產品質量問題。
- 2.如因操作失誤造成對產品的損害,不在保修範圍。
- 3.自行拆機後,不予保修。
- 4.標貼撕毀的機器,不予保修。


不在保修範圍內的產品,我司可提供維修服務,維修費用需由客戶承擔。

		客戶姓名	
購買日期		聯繫電話	
電子郵箱			
客戶地址			
產品異常現象描述			

PowerbankModel:WT-01


User Manual

Thanks for choosing WT-01 power bank model
This model compatible with most DC 5V devices



Product presentation

- 1.This item consists of two USB ports, one Type-C port and one Micro port. a wireless charger, digital display, four lights



- 2.Power indicator: this item has a digital display screen, which is convenient to show the power.Press the button to display the current state of power.




3. Floodlight mode: long press the button for 3 seconds, 4 lights on; Click the button and the four lights will be slightly on. Then click the button again will be SOS mode;Click the button again, flash mode; Long press 3 seconds to turn off 4 lights.
4. Click the button to open the wireless charge, and the green wireless charge indicator light will always be on. If no device is on the wireless charge after 35 seconds, the wireless charge function will be off, and the green wireless charge indicator light will be off, the wireless charging power fault indicator light will show red.

Charge mobile phone devices

1. Support quick charging of QC and charging your devices quickly
2. Support wireless charging 10W output. iPhone 7.5W wireless charging
3. Support pass through function
4. Support charging of most DC5V mobile phones and devices.
5. Choose different cables according to different phones and devices.

Charge Power Bank

1. The item supports type-C port and Micro port to charge your phones, Also support Solar panel recharging. The max power of solar panel is 5.5V/0.3A(as shown in Figure 2/3/4)

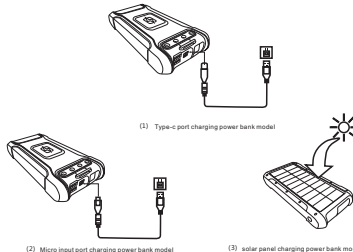

2. Different chargers charge the power bank for different time,if using fast charger can be as fast as 5 hours to fully charged the power bank

Attentions

1. Cause the capacity is high of this model, use fast charger to full charge it need only 5 hours. but subject to the actual use.
2. If this model doesn't work, Please check the devices connected or not, Confirm you chose the right cable or not. Suggest using original adapter and cable accessories.
3. As the power bank has conversion rate, so the battery capacity is not the real capacity you can use. The battery capacity is not the real capacity you can use.
4. Support most mobile phone model.
5. At least every half year, make a full charging circulation.

Storage and working temperature

Storage and working temperature(Please use it during the normal temperature in order to protect the battery life)

Storage temperature:-5~ +35℃ (Less than one month) -5 ~+30℃ (Less than 6 months)

Working temperature: Charging0~+45℃ . discharging-20~+60℃

safety instructions

Warning: If don't follow safety instructions,maybe cause a fire,some breakdown or other damages



made from high quality Lithium battery cells and cores.Please rest assured of this.

- 1.Don't separate this model by yourself. Don't put product into high temperature or fire
- 2.Do not approach flammable items
- 3.Do not hit with hard objects
- 4.If find there is bulge,Please stop using
- 5.Children don't touch

Specification

Battery type: Li-ion battery
Capacity: 26800mAh
solar panel input:DC5.5V/0.3A
Micro input:DC5V/3A 9V/2A 12V/1.5A
TYPE-C input:DC5V/3A 9V/2A 12V/1.5A
USB output1:DC5V/2A
USB output2:DC5V/4.5A 4.5V/5A 9V/2A 12V/1.5A
TYPE-C output:DC5V/3A 9V/2A 12V/1.5A
Wireless charge:10W
Size:176*86.4*28.7mm
Weight: 530g
Color:Black Red Blue Orange

Accessories

Power bank
A-C Cable
Sling
Manual
Warranty card

Warranty Card

The warranty time is one year

Warranty Policy

Please show your warranty card when you need warranty services, and fill in the relevant information ,we offer one year warranty time.

Scope of warranty :
1.The failure of a product under normal use

Even if within the warranty period, if the following occurs, certain maintenance costs will be charged.
1.The malfunction and damaged caused by incorrect use ,the unauthorized repairs and alteration.
2.Products tags are tear up.

Model		Name	
Purchase Data		Contact Number	
Email			
Address			
Anomaly Product description			